

ATC/IMRS4852310

1

M

*	HCMXB-2RS485-BD	V1.00	0.15W	RS485 Modbus RTU/ASCII

M

M

1.1

1.1.1

--	--

--	--

--	--

1.1.2

RUN STOP


--

*

2.2.2

24PIN	

2.2.3



4 HCMXB-2RS485-BD

		RS485
		RS485
	RS485	

2.2.4

--	--

--

2.3




3

2.1

g	15	
mm	18.6 (W) *51.1 (H)*36.1 (D)	
	0~50	
	-25~75	
	5~95%RH	
	5~95% RH	
	1m 2	
		5 ~150 Hz
		3.5mm
		1.0g
		3

	RTU/ASCII
	32
	120Ω
	9600 bps 19200 bps 38400 bps 57600 bps 115200 bps
	7 8 8
	1
	1

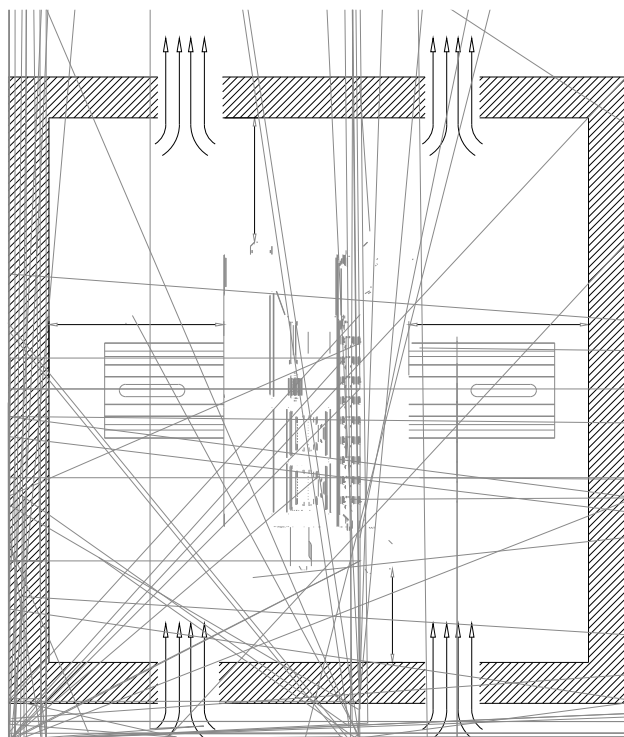

4.1.2




4.1.3




4.1.4

50N


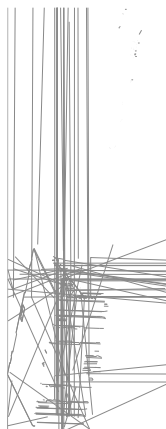


50N

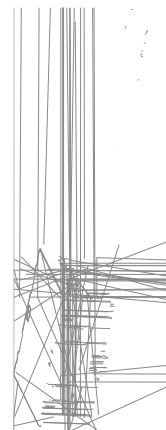

4.2.2

RS485

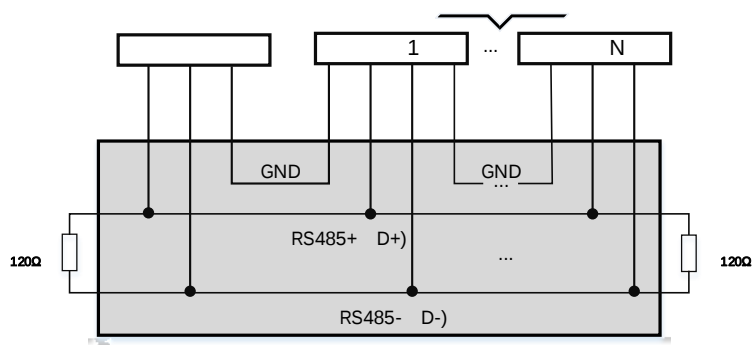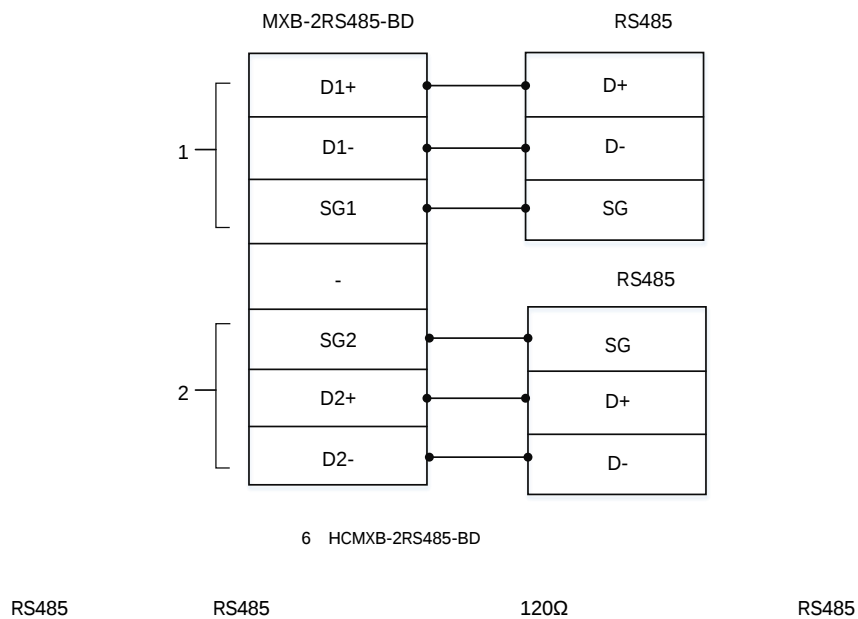


7 HCMXB-2RS485-BD

1.	RS485	120Ω	1/4
2.			
3.	RS485		

5 RS485

HCM511S

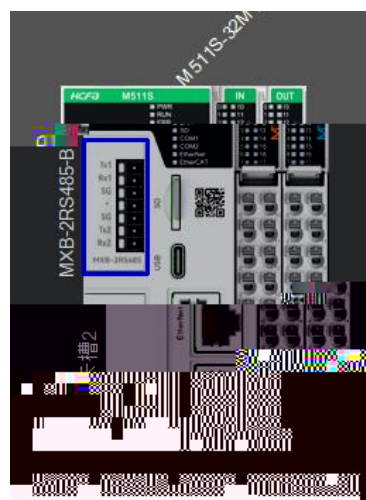

HCMXB-2RS485-BD

COM

11 12

- d 6í_ A S 1 0 2 „ . ¿ C • 2 „ . ¿ G V ñ u G € C W C 0

1

1~255

串口

COM11 (RS485)

站 号: 1

波 特 率: 9600bps

协 议: (7, E, 1) ASCII

主从模式: 主站/自由协议

延迟时间: 3 ms

COM12 (RS485)

站 号: 2

波 特 率: 9600bps

协 议: (7, E, 1) ASCII

主从模式: 主站/自由协议

延迟时间: 3 ms